


# CHESA W04

UNDERPRESS

## Specifications

- For underpress operation w/Industry Standard 28, 44 and 50 inch Horizontal Trim Presses
  - Incorporates patented Irwin R&D design concepts
  - Powered and controlled from installed circuitry in end user's TP cabinet
  - 15, 20, 25, and 30-HP drive packages available, depending upon resins and output needs
  - Manual, semi-auto, and fully automatic lubrication systems available
  - Electrical safety interlock with TP
  - Optional entry chute configuration and TP-mounted guide rails to form an integrated position control and guard system
  - Easy access to screen
- May be ordered as standard Left Hand or optional Right Hand configuration to suit plant layout
  - Combination 7.5 HP blower options available
  - Output to plant recycling estimated (500+CFM)
  - Optional air recirculation system to assist material evacuation with heavy resins
  - Optional air recirculation system to assist light (foam) material internal flow for process augmentation
  - 5-HP blower standard.
  - Output with 3/8 screen, foamed plastics = 600-900 #/hr
  - Output with 3/8 screen, solid plastics = 800-1400#/hr

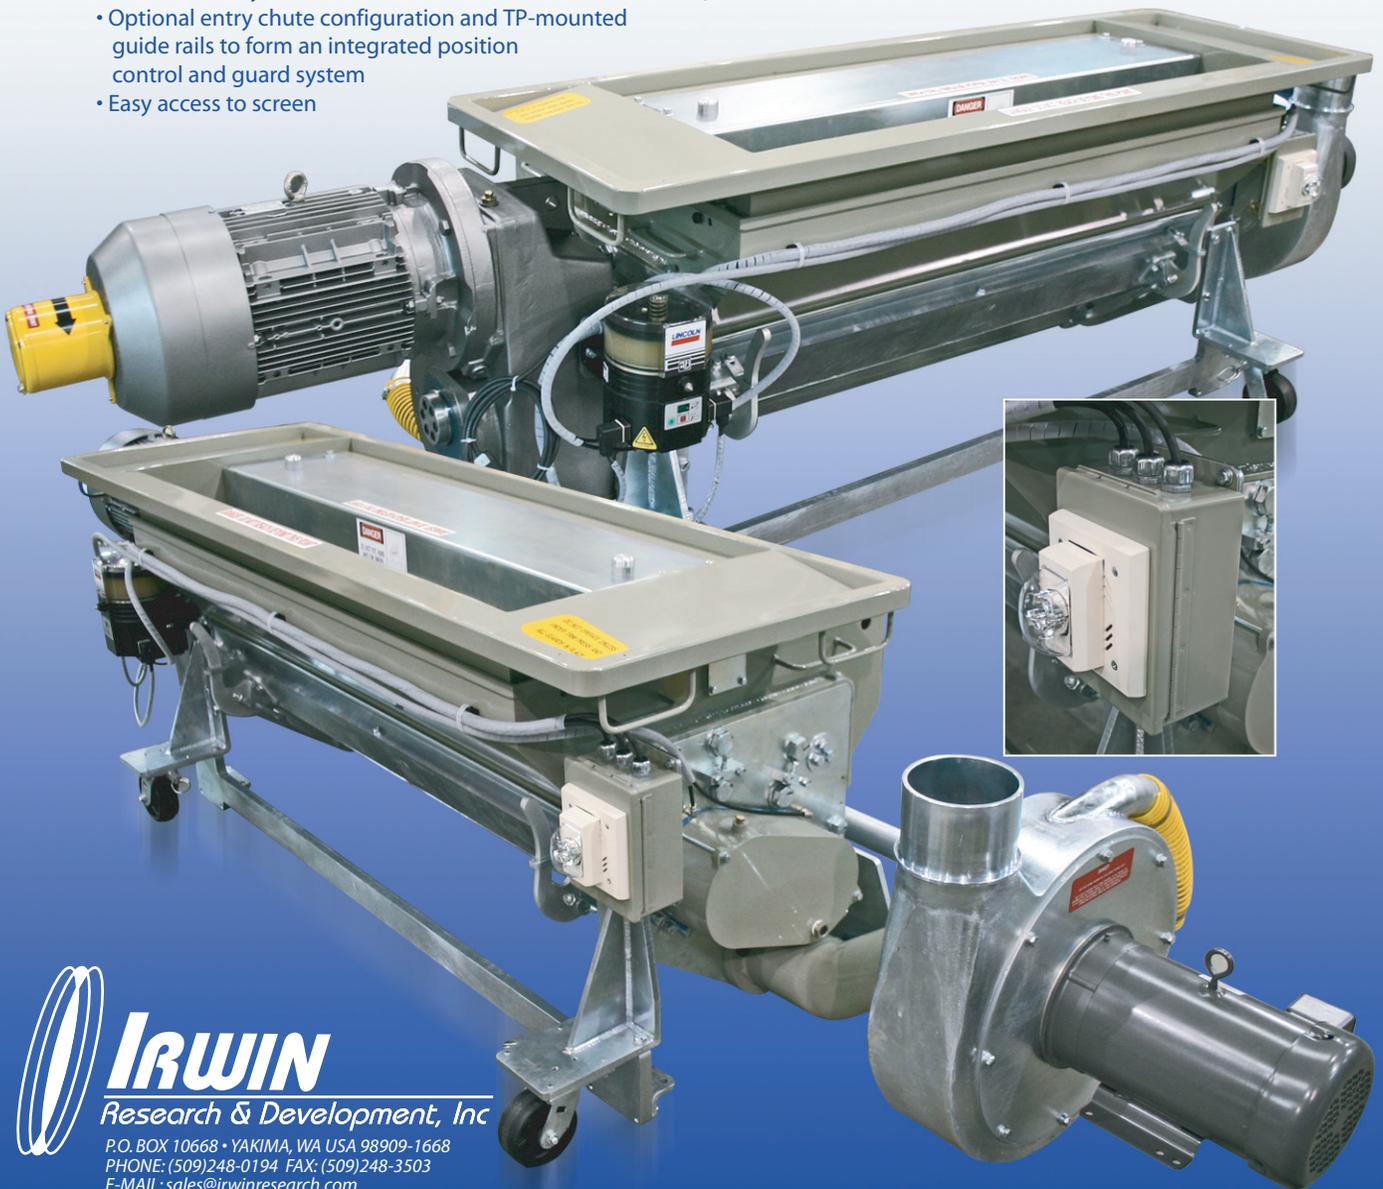

**IRWIN**

Research & Development, Inc

P.O. BOX 10668 • YAKIMA, WA USA 98909-1668  
PHONE: (509)248-0194 FAX: (509)248-3503  
E-MAIL: sales@irwinresearch.com  
www.irwinresearch.com